



E-Mail Address: comercial.logistica@deoilservices.com

Mobile No.: . 244 925 598 883

Office Phone: . +244 930 654 000

Luanda: Patriota-Rua da Administração/Galerias M.R

Cabinda: Rua Direita do Povo Grande, Casa Número 10

NIF.: 5101163848


Luanda-Angola

WHAT MAKES US DIFFERENT...

What makes us different

Our difference, define those aspect of our businesses that make us stand out from our competitors. Closely aligned with our core values, these brand attributes reflect on the feedback we received from our customers



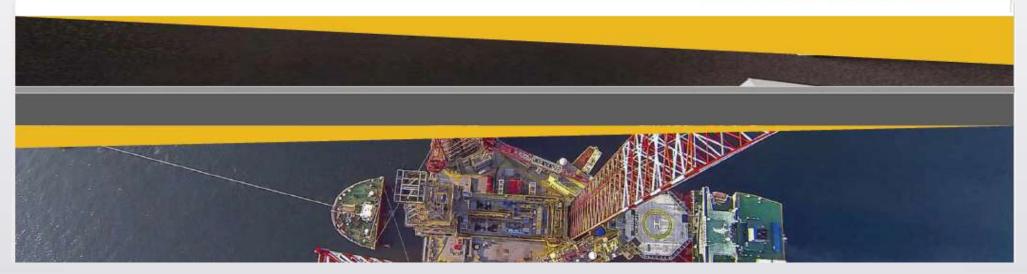

Group D&E - Abrasives













Industry supply in Marine, oil and Gas and mining Industry

groupoilserviceslad@contractor.net

ESPUMIFERO AR AFF 3-6% UL LISTED CERTIFIED



SKUM ARC 3X6 UG 3%x6% AR-AFFF Concentrate

- tumbuck resistance:

 The foam blanket blocks oxygen supply to the fuel.

 Uquid drains from the foam blanket and forms either:

 An aqueous film on a hydrocarbon fire, or

The water content of the form solution produces a cooling effect for additional fire suppression.

TYPICAL PHYSIOCHEMICAL PROPERTIES AT 26 °C

Viscous Yellow Liquid 1.00 ± 0.02 g/ml 7.0 - 8.5 1.3450 minimum 1400 ± 300 cPs

sediment** c 0.25%
Spreading Coefficient 3 dynasium minim.
Pour Point -3 °C

Spreadury Controllers: J Sylvanom mercenium in Jo disease.

Privat Parts:

STE.

Trinsas Privat:

"No reaction Visionium" Spinde 64, queel 60 rpm

"No reaction Visionium" Spinde 64, queel 60 rpm

"No reaction Visionium" Spinde 64, queel 60 rpm

SIGNA MIC 2001 Connectorais la en non Newtonium Studi

Gold a both perovilopiants and d'historappic, (harefure, dynamic

Visionium) will Societante an el fabric (reconnecto en fabric (reconnecto The SKUM ARC 3X6 UG Concentrate formulation contains short-chain, C-6 fluorischemicals manufactured using a talomer-based process that does not produce PFOS.



Approvals, Listings, and Standards



SXLM ARC 205 US Concentrate is inferreded for use on both types of Class & Fires hydrocarbon Sasla with low water solubility, exch a crude oils, pencifres, dessel heats, and avuision fusit; and poles solvent fusis with appreciable water solubility, exch as morbity and eighty aboruls, acctore, and methyl ethyl keston. It may also be used in conjunction with for chemical appents to provide own present free suppression

SKUM ARC 300 UG Concentrate can be ideal for fixed, semi-fixed, and emergency response findighting applicant har.

• Fuel or chemical storage tanks

- Industrial chamical and petroleum processing facilities
 Truckhall loading and unloading facilities
- . Flammable liquid containment areas.
- . Docks and on-board marine systems



INFORMAÇÃO TÉCNICA

SOLVEDY RW (RIG WASH)

DESENGORDURANTE MULTIUSO BIODEGRADÁVEL

DESCRIÇÃO: Recomendado para limpeza e manutenção de instalações

equipamentos industriais, lavagem de motores, desengordurante em cozinhas, fogões, exaustores e

pavimentos.

PROPRIEDADES: Produto isento de solventes.

Penetra e liberta rapidamente a fuligem e todo tipo de gorduras. Económico, devido à sua elevada concentração.

Não inflamável

MODO DE EMPREGO: Aplicar o produto diluído em água entre 10 % e 50%,

conforme o efeito pretendido, por pulverização, esfrega,

imersão ou por máquina de auto pressão.

PERIGOSIDADE: Xi - (Irritante)

S 1/2 - Guardar fechado à chave e fora do alcance das crianças. S 24/25 - Evitar contacto com os olhos. S 26 - Em caso de contacto com os olhos, lavar de imediato com água abundante e consultar um médico.

S 45 - Em caso de acidente ou indisposição, consultar um médico.

CARACTERÍSTICAS: Aspecto do produto a 100% - Liquido limpido

Cor do produto a 100% - Verde pH solucao a 1% - Min. - 11,5 Maá. - 12,5

Aroma intenso

EMBALAGEM: Plástica de 20Litros / tambor de 210 litros / IBC 1000Lts





KARCHER- HIGH PRESSURE WASHER HD 10/25-4 S





LABEL PRINTER



Duralabel Lobo Industrial Label Printer

Contact us for a detailed quote.



Duralabel Bronco Max Industrial Label Printer


Contact us for a detailed quote.



Duralabel Toro Max Industrial Label Printer


Contact us for a detailed quote.

MATERIAL DE VARREDURA & PROT. PESSOAL

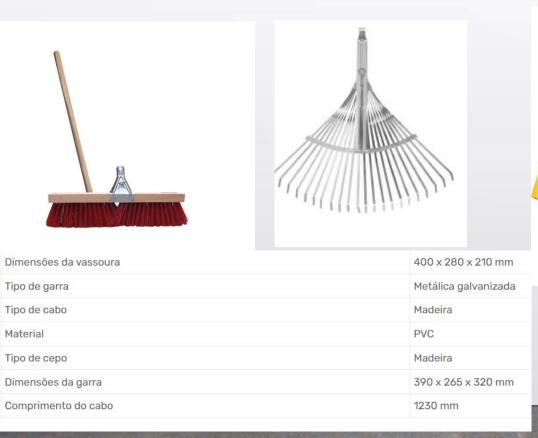



MARINE SAFETY EQUIPMENTS

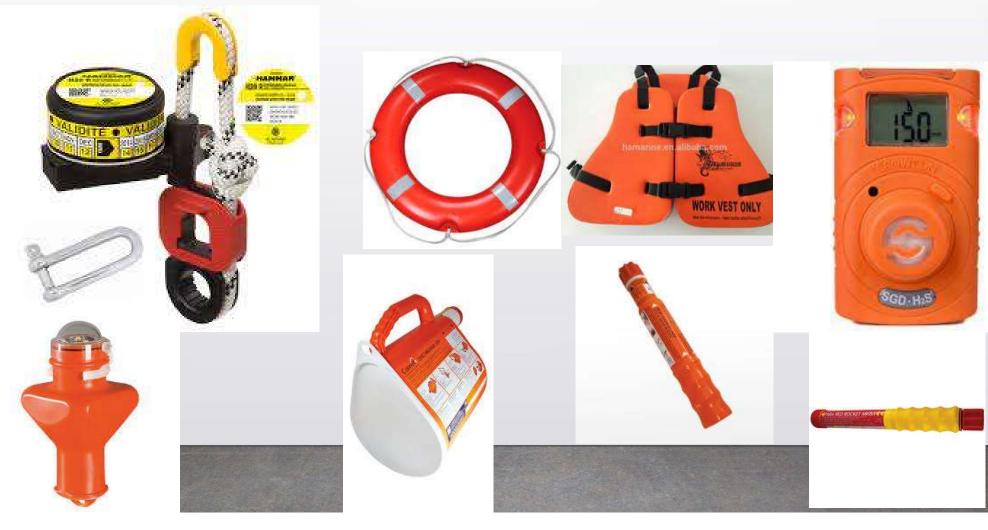



- A Dorsal attachment D-Ring for Fall Arrest.
- Adjustable chest, shoulder and
- · Ideally positioned sit-strap for
- Certified to EN 361:2002.



ENERGY ABSORBING FORKED WEBBING LANYARD (€ SL 25100

0....

- Made of 44mm Wide Webbing.
 Available Length: 1.5 mtr, 1.8 mtr and 2.0 mtr.
- Equipped with Screw Locking Karabiner (112) with Energy Absorber at one end and two Steel Scaffold Hooks at other end.
- Certified to EN 355:2002 + VG 11/PFE 63 (Additional Static Strength Test).



ENERGY ABSORBING WEBBING LANYARD SL 15100

- · Made of 44mm Wide Webbing
- Available Length: 1.5 mtr. 1.8 mtr and 2.0 mtr.
- Equipped with Screw Locking Karabiner (112) with Energy Absorber at one end and Steel Scaffold Hook at other end.

(€

- Certified to EN 355:2002.
- Quarter turn Locking Karabiner is also available instead of Screw Locking Karabiner.



- A Dorsal attachment D-Ring for Fall Arrest.
- Adjustable chest, shoulder and thigh straps.
- Idealy positioned sit-strap for extended comfort.
 Shoulder and thigh-straps differentiated by a dual colour
- scheme. . The Lanyard of 1.8 mtr spliced at
- the Dorsal D-ring is made from Polyamide Twisted Rope of dia 12 mm having Scaffold Hook PN 131 at the anchorage end.
- . Length of the Lanyard is 1.8 mtr.
- Certified to EN 361:2002 and EN 354:2002.

CE



FULL BODY WORK POSITIONING HARNESS SL 10200

. A Dorsal Attachment D-ring for Fall Arrest,

- . Lateral D-rings are provided for Work Positioning at height. · Adjustable shoulder, chest and thigh straps for wearing
- comfort · Shoulder and thigh-straps differentiated by a dual colour
- Ideally positioned sit-strap for extended comfort.
 Certified to EN 361:2002







Circuit Breaker Lockouts

KIT OF SAFETY LOCK



Modern MBOKIT Lockout Kit




Master Lock 1457E410KA Lockout Pouch Electrical Focus



Master Lock 1457V410KA Personal Safety Lockout Pouch Valve Focus

MSA EQUIPMENTS

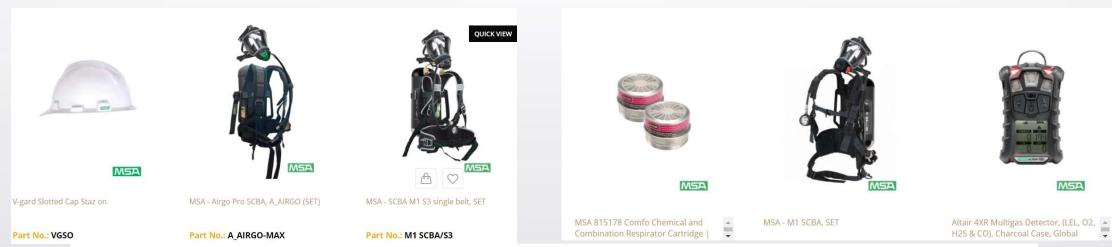



V-Gard® C1™ Hard Hat



V-Gard® 950 Non-Vented Protective Cap



V-FIT™ Safety Harness



G1 Full Face Mask



ULTIMA® X5000



MSA

F1XF Gallet - White

Part No.: GXM2111100010-BA35

V-Gard Slotted Full-Brim Hat, White, W/Fas-Trac III Suspension-Part n°475369





MSA



MSA



MSA

MSA Altair 5X Multigas Detector, 4-Gas, LEL,O2,CO,H2S, Color Display,



MSA Altair 5X Multi-Gas Detector Economy Kit, LEL, O2, CO, H2S,



Altair H2S Hydrogen Sulfide Single Gas Detector, Low Alarm 10 ppm, High



MSA

F1XF Gallet- Red

Part No.: GXM2111100010-RE35

MS

GME Comfo Multi Gas Respirator Cartridge

Part No.: 492790



SAFETY EQUIPMENTS

POPULAR CATEGORIES



Gas Detectors



LOTO



Safety Showers



Signage Printers



Safety Shoes



Arc Flash



Spill Kits



Fire Retardant Coveralls



PORTABLE GAS DETECTORS

Shop for popular models from BW by Honeywell, MSA, Industrial Scientific, Dräger Etc.

Group D&E ADHESIVES SEALANTS & IIIIITAPES, H20 & Welder Cyliders IIII
















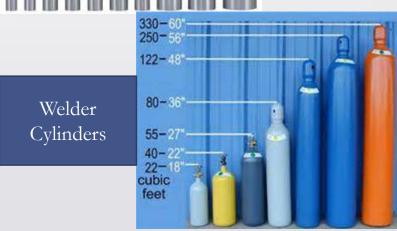

BIG BAGS - FROM 1.250 KG TO 2.000 KG



Old Glamis Road, Dundee, Scotland, DD3 8JB Tel. 01382 823824 Fax. 01382 823825


Safe Working Load	1250Kg
Safety Factor	6:1
FIBC Class	STANDARD DUTY
Test Number	206998.2/08-2
Tested By	NEL
Manufactured	27 Aug 2009

Bag Number 219 ITS





Group D&E FIXING & FASTENERS

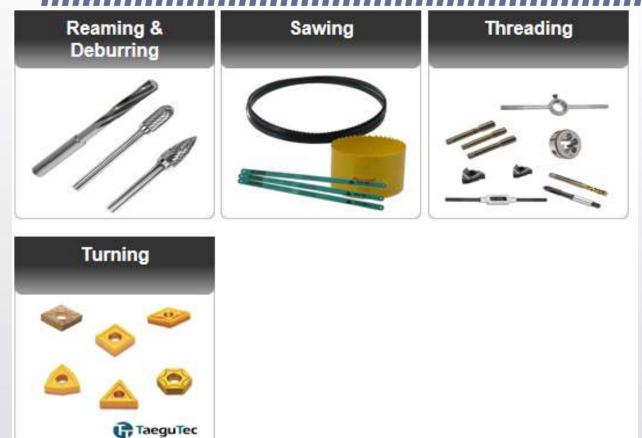






Industry supply in Marine, oil and Gas and mining Industry

groupoilserviceslad@contractor.net


Group D&E FIXING & FASTENERS

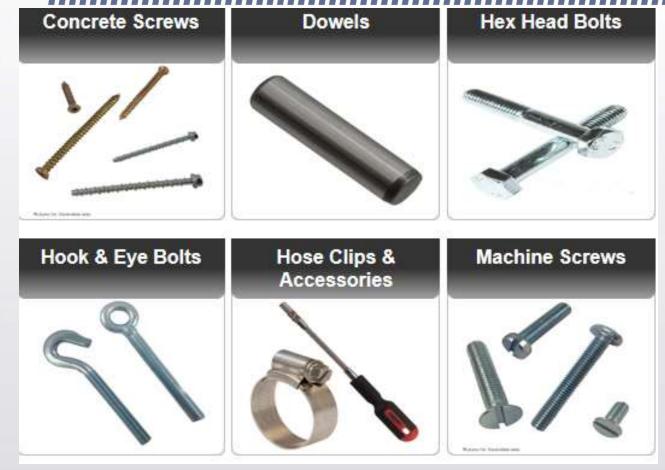

D&E Group HAND TOOLS & FIRE FIGHTING



Group D&F HAND TOOLS

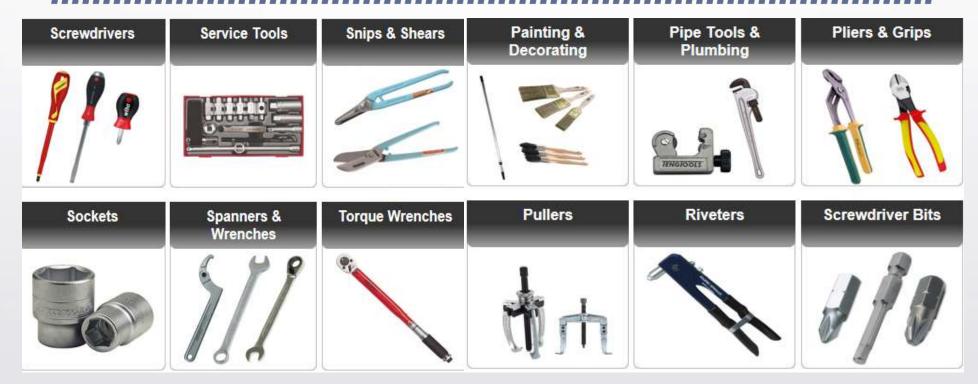

Group D&E HAND TOOLS & EQUIPMENT

PALLET TRACK











Industry supply in Marine, oil and Gas and mining Industry

groupoilserviceslad@contractor.net

DA1

Daniel Abega; 11/01/17

Group D&E HANDLING AND STORAGE



Group D&E Lifting Gear














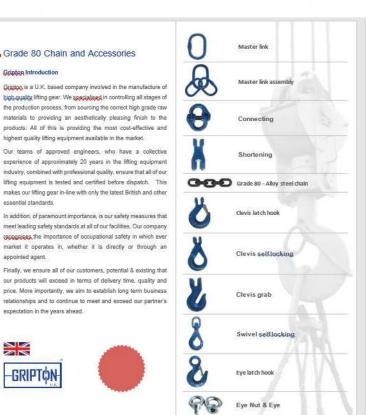



Grade 80 Chain and Accessories

highest quality lifting equipment available in the market.

Gripton Introduction

essential standards.


appointed agent.

expectation in the years ahead.



Fire Proof Endless Type - GRIPTON-

- The Einencology round sling produced by high strength, heat resistant aramid fiber.
- This round sling is light, soft, flame-retardant, heat-resistant, excellent abrasion resistance, high strength and low elongation, high safety coefficient long life, non-conductive, non-electric space, danger, have a good chemical corrosion resistance.
- Apply to flame, sparks, high temperature excitorsact, use of temperature range from -40°C to 180°C, half diameter of ordinary lifting belt.
- Working load limit from 1T to 20T.
- safety factor 7:1



Flat Webbing Slings

We manufacture flat webbing slings as per European Norm, EN1492-1 with a safety factor of 7:1.

(detitication label on each sling is atiched to indicate load limit (WLL) & length of the sling (EWL).

Webbing slings are made from high tenacity 100% polyester (PES) webbing material.

These slings have the following advantages:


- Low weight, therefore offering easy handling
- Protection against hand injuries
- Protection against cargo surface damage
- Highly flexible and adaptable to given shapes
- UV-resistant, eliminating material ageing or brittlement
- Heat resistant up to 100°C
- Water resistant fabric, preventing frost damage (down to -40°C)
- Coloux coded as per latest EN 1492-1



Drum Lifter

This Drum Lifting is used for your hoist hook or fork mounted hook. Forged hooks are shaped to enhance the rims. of drum.

- 3





- Cargo Securing Equipment

Load Binder

Load binder is the professional way to tiedown large loads. Big handles and carbon steel construction for maximum leverage. Greater supengible, and easy handling, Ideal for truck mounted loads. Ratchet motion makes load tightening faster and easies and permits quicker tightening if the load shifts. Equipped with double hooks.



Ratchet Cargo lashing assembly

- Made with 100% polyester webbing
- MBL of ratchet lashings: 1 ton, 5 top, 10 ton and 12 ton



29

is a device for adjusting the tension or length of ropes, cables, tie rods, and other tensioning systems. It normally consists of two threaded eye botts, one screwed into each end of a small metal frame, one with a left-hand thread and the other with a right-hand thread. The tension can be adjusted by rotating the frame, which causes both eye bolts to be screwed in or out simultaneously, without twisting the eye bolts or attached cables.



Hand winch


Turn Buckle




- · Enhanced mechanical parts
- Automatic brake
- Adjustable & dismounted crank
- 2 securing planes horizontal or vertical (according to model)
- Can be unclutched when off-load, whilst impossible to unclutch.
- Highly rugged design, thanks to the exceptional rigidity of the tan.
 Hand winch for using:
- Upgrade a wire transfer, loading & unloading heavy objects, etc.






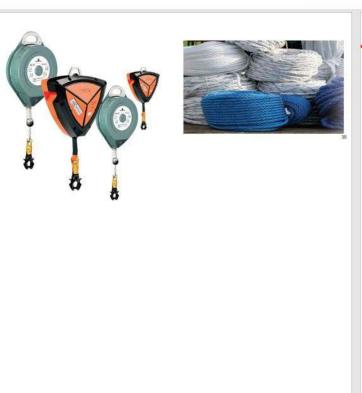

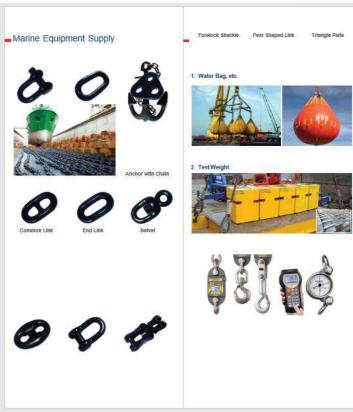

Group D&E MARINE PAINTS

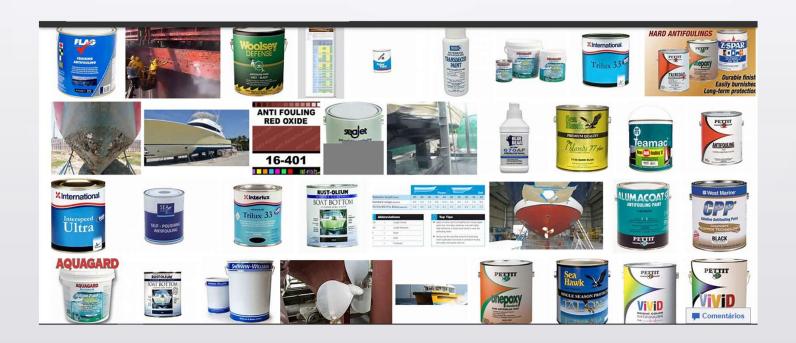

Group D&F LUBRICANTS MOBIL / CASTROL







Group D&E LUBRICANTS SHELL / TOTAL











Industry supply in Marine, oil and Gas and mining Industry

groupoilserviceslad@contractor.net

Group D&E LUBRICANTS & CHEMICALS




Group D&E MEASURING TOOL







Group D&E PAINTING AND DECORATING

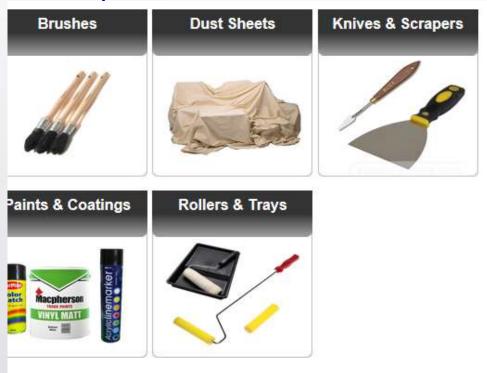

D&E Group PNEUMATIC & HYDRAULIC

- AIR COUPLING ADAPTOR 1\4 BSPT FEMALE X NIPPLE ACA2746 1/4FXN
- AIR COUPLING ADAPTOR 1\4 BSPT MALE PLUG X NIPPLE ACA2593
- 1/4 BSPT FEMALE QUICK RELEASE COUPLING AC91CF








D&E Group Marine Filters & Generators Filters (Perkins, Caterpilar, Fleetguard & Volvo)


































Industry supply in Marine, oil and Gas and mining Industry

groupoilserviceslad@contractor.net











